



Dynapro Tipmatic Soft-close

For 19mm (3/4") drawer material

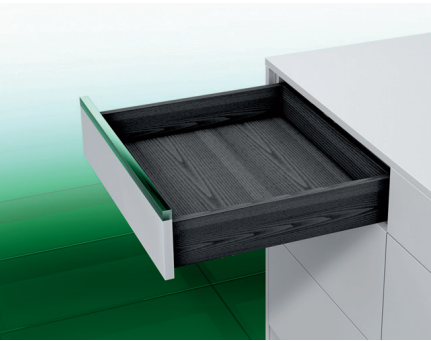

- Face frame or frameless applications from 16mm (5/8") up to 19mm (3/4") drawer material
- Mechanical opening system for handle-free fronts
- Combines Tipmatic function with Soft-close damping
- Tool-free assembly of the Tipmatic Soft-close unit
- One unit for nominal lengths 305mm (12") up to 762mm (30")
- 3 tier adjustment for the opening force
- Wide activation zone due to synchronization bar
- Works with all Dynapro types including heavy duty
- Dynapro Tipmatic Soft-close works with all Dynapro front locking devices


Tipmatic Soft-close

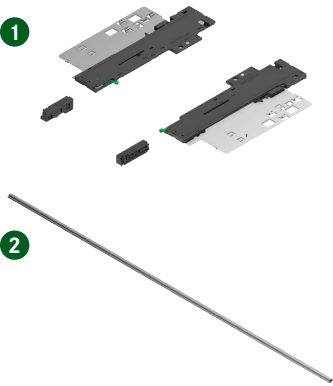

Description	Item No.	PU
(Must order separately)		
1 Tipmatic Soft-close set, unit and activator	F134109323607	10
2 Tipmatic synchronization bar - cut to length, 952mm (37 1/2")	F134109410207	10

Note: Tipmatic Soft-close does not work with 9" slides.

Drawer Length	Nominal Length	Min Inst. Depth	Max Inst. Depth
305 (12")	323 (12 23/32")	327 (12 7/8")	370 (14 9/16")
381 (15")	399 (15 23/32")	403 (15 7/8")	446 (17 9/16")
457 (18")	475 (18 11/16")	479 (18 27/32")	522 (20 9/16")
533 (21")	551 (21 11/16")	555 (21 27/32")	598 (23 17/32")
610 (24")	628 (24 23/32")	632 (24 7/8")	-
686 (27")	704 (27 23/32")	708 (27 7/8")	-
762 (30")	780 (24 23/32")	784 (30 7/8")	-

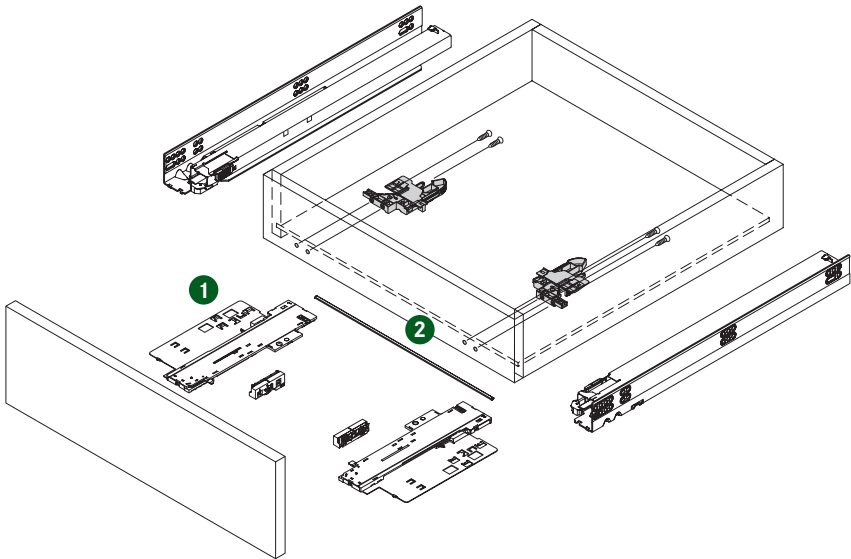

PU - Packaging unit

