


CONCEALED DOOR STRAIGHTENER



DSR423

HINGES

DOOR STRAIGHTENER

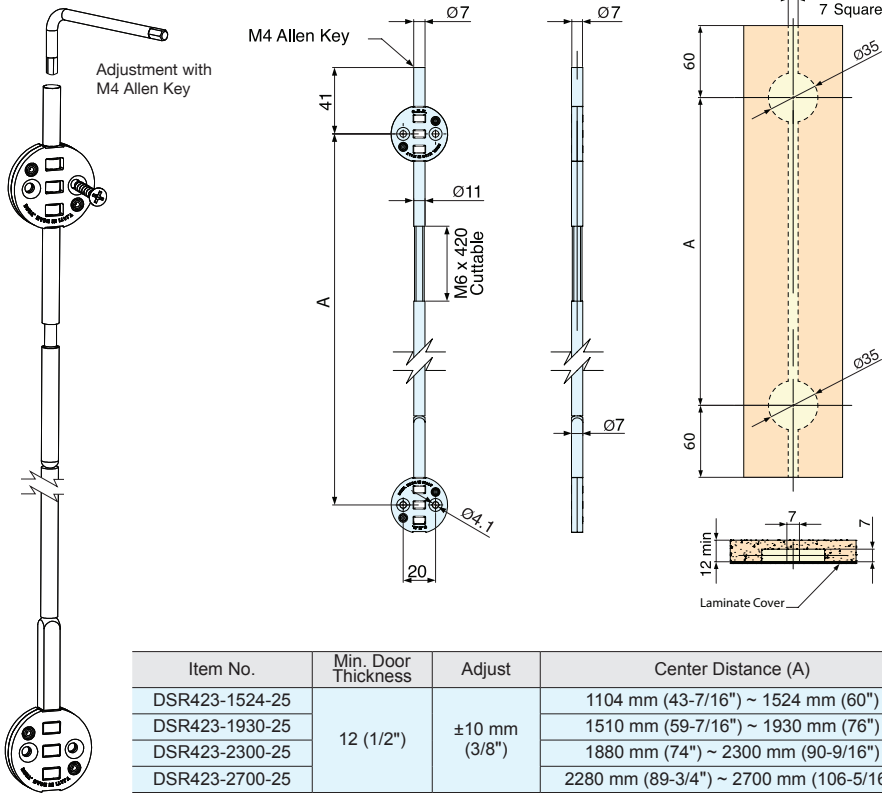


- Fully concealed/hidden door straightener. Recessed mounted under laminate.
- ± 10 mm adjustment can be made from the top of the door with a M4 Allen Key (included).
- Min. door thickness 12mm (1/2").
- Optional mounting holes to secure door straightener to door using 4 M4 (U.S. #8) flathead countersunk wood screws.
- Note: Sold in Boxes of 25 pieces.

Box (pcs)	Materials	Finish
25	Rod: Steel	Plain
	Adjuster: Zinc	Nickel

Item No.	Min. Door Thickness	Adjust	Center Distance (A)	Door Length
DSR423-1524-25	12 (1/2")	± 10 mm (3/8")	1104 mm (43-7/16") ~ 1524 mm (60")	1224 mm (48-3/16") ~ 1644 mm (64-3/4")
DSR423-1930-25			1510 mm (59-7/16") ~ 1930 mm (76")	1630 mm (64-3/16") ~ 2050 mm (80-11/16")
DSR423-2300-25			1880 mm (74") ~ 2300 mm (90-9/16")	2000 mm (78-3/4") ~ 2420 mm (95-1/4")
DSR423-2700-25			2280 mm (89-3/4") ~ 2700 mm (106-5/16")	2700 mm (94-1/2") ~ 2820 mm (111")

CONCEALED DOOR STRAIGHTENER

DSR403

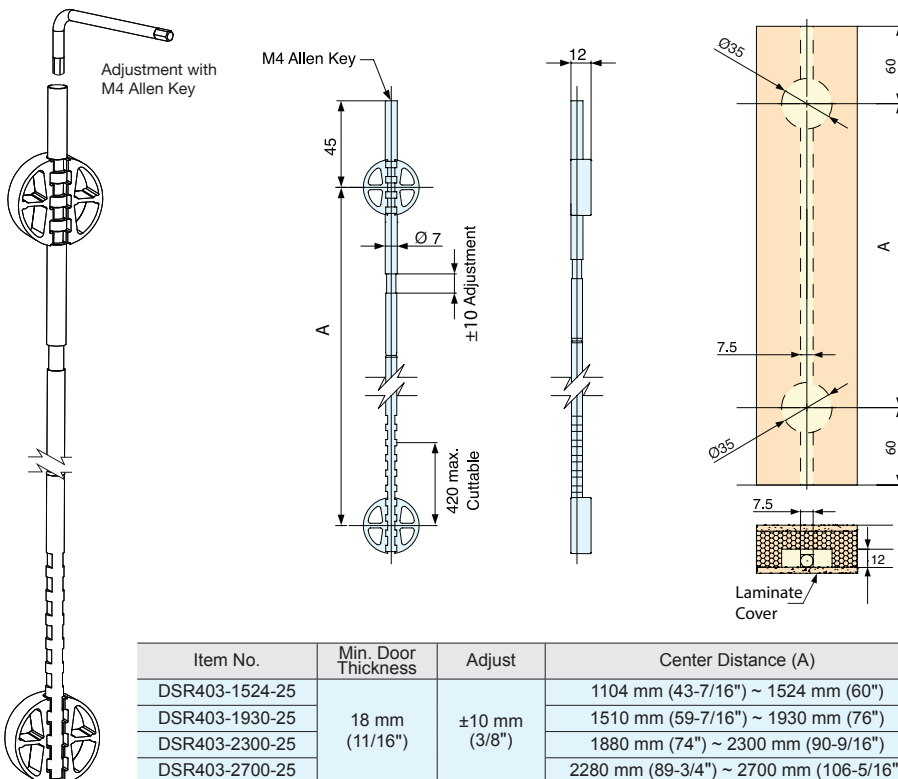

- Fully Concealed/Hidden Door Straightener. Recess mounted under laminate.
- ± 10 mm adjustment can be made from the top of the door with a M4 Allen Key (included).
- Min. door thickness 18mm (11/16").
- Can be cut from the bottom up to 420mm (16-9/16").
- Pressure-fit into place, screws not needed for installation.
- Note: Sold in Boxes of 25 pieces.

Box (pcs)	Materials	Finish
25	Rod: Steel	Plain
	Adjuster: Zinc	Nickel

Item No.	Min. Door Thickness	Adjust	Center Distance (A)	Door Length
DSR403-1524-25	18 mm (11/16")	± 10 mm (3/8")	1104 mm (43-7/16") ~ 1524 mm (60")	1224 mm (48-3/16") ~ 1644 mm (64-3/4")
DSR403-1930-25			1510 mm (59-7/16") ~ 1930 mm (76")	1630 mm (64-3/16") ~ 2050 mm (80-11/16")
DSR403-2300-25			1880 mm (74") ~ 2300 mm (90-9/16")	2000 mm (78-3/4") ~ 2420 mm (95-1/4")
DSR403-2700-25			2280 mm (89-3/4") ~ 2700 mm (106-5/16")	2700 mm (94-1/2") ~ 2820 mm (111")