





TLP-S

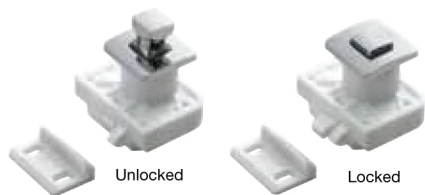

Installation

- Knob is stored flush when pushed in and not in use.
- Knob pops out when pressed to open the door.
- Latch securely locks the door with deadbolt.
- Door Thickness: 19 mm~30 mm (3/4" ~ 1-3/16").
- Holding Force: 20 kg (44 lbs)
- Non-Handed: Can be installed on left or right side.
- Order Latch Body (TLP-LBM/WHT) and Push Knob (TLP-S-BB/XX) for complete set.




TLP-S-BB-CR




TLP-S-BB-G

TLP-S-BB-SN

TLP-LBM/WHT



Bore Dimensions



Threaded Screw	Door Thickness	Dimensions X
L = 24	19 (3/4")	40.5 (1-19/32")
	20 (25/32")	41.5 (1-5/8")
	21 (53/64")	42.5 (1-43/64")
	22 (55/64")	43.5 (1-23/32")
	23 (29/32")	44.5 (1-51/64")
	24 (15/16")	45.5 (1-51/64")

Threaded Screw	Door Thickness	Dimensions X
L = 30	25 (63/64")	46.5 (1-53/64")
	26 (1-1/64")	47.5 (1-55/64")
	27 (1-1/16")	48.5 (1-29/32")
	28 (1-3/32")	49.5 (1-61/64")
	29 (1-9/64")	50.5 (1-63/64")
	30 (1-11/64")	51.5 (2-1/32")

Part Name	Material	Finish	
		Knob	Latch
Latch Body	Polyamide	Chrome (CR)	White
Push Button	Brass	Satin Nickel (SN)	
Push Button Base	Zinc Alloy	Gold (G)	

Item No.	Part Name	Holding Force (kg)
TLP-S-BB/CR	Push Knob and Base	20 (44 lbs)
TLP-S-BB/SN		
TLP-S-BB/G		
TLP-LBM/WHT	Latch Body	